


WITH COVER



P/N LEGEND

51986-XXX X X -XXX

NO OF CKT  
008:8PIN

XXX	Housing Color
001	Black

PACKING

0:TAPE & REEL

7:TAPE & REEL WITH COVER

PLATING

P:GOLD FLASH ON CONTACT  
AND TIN PLATED ON SOLDER AREA

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,  
UL94V-0; COLOR:BLACK.

1.2 CONTACT: COPPER ALLOY

1.3 FITTING NAIL : COPPER ALLOY

2. FINISH:

2.1 CONTACT:

P: GOLD FLASH ON CONTACT AND TIN PLATED ON SOLDER  
50~100u" MIN NICKEL UNDERPLATING OVERALL

2.2 FITTING NAIL:

80~150u"MIN TIN PLATING OVERALL,  
50~100u" MIN NICKEL UNDERPLATING OVERALL

3. REFLOW SOLDER CAPABLE TO 260°C

PER ACES SPEC.


4. WAVE SOLDER CAPABLE TO 260°C

PER ACES SPEC.

5. SPEC. PLS. REFER TO PS-50975-xxxxx-xxx

6. PACKAGE PLS. REFER TO 51986-xxxxx-xx-TRP

7. PART NUMBER

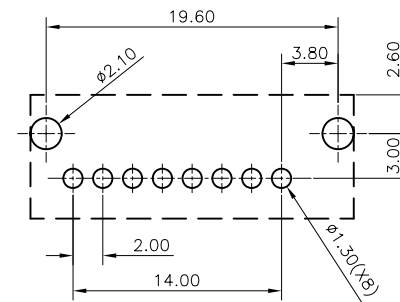

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

一般公差 <b>TOLERANCES</b> X ±0.50 .XX ±0.15 X ±0.25 .XXX ±0.10 ANGLES ±2°		<b>宏致電子股份有限公司</b> <b>Aces Electronic Co.,Ltd.</b>	
檢驗尺寸標示 <b>SYMBOLS</b> (M) (L) INDICATE <b>CLASSIFICATION DIMENSION</b>	品名 (TITLE) 2.00mm Battery Conn. Female DIP R/A H=9.35	製圖 (DR) 12/12/11' Brave	審核 (CHKD) Sam
(M) MARK IS CRITICAL DIM. (L) MARK IS MAJOR DIM.	圖號 (DWG.NO) 51986-XXXXX-XXX	核准 (APPD) Jason	
表面處理 (FINISH)	比例 (SCALE) 單位 (UNITS) 2:1 mm	張數 (SHEET) 1 OF 1	尺寸 (SIZE) 版 (REV) A4 A