


- NOTES:
1. MATERIAL: COPPER ALLOY, THICKNESS  $0.20 \pm 0.01$ .
  2. PLATING:
    - 30u" MIN. NICKEL UNDERPLATING OVERALL
    - L: 80u" MIN. PURE TIN PLATING OVERALL
    - C: 15u" GOLD PLATING ON CONTACT AND SELECT MATTE TIN IN CRIMP AREA.
    - D: 30u" GOLD PLATING ON CONTACT AND SELECT MATTE TIN IN CRIMP AREA.
  3. COMPONENT LOAD PER REEL: XXK PCS.
  4. APPLICABLE WIRE RANGE:
    - 001 STANDARD: AWG#20~24
    - 002 STANDARD: AWG#26~30
  5. INSULATION O.D.:  $\phi 1.85\text{mm}$  (MAX.)
  6. HOUSING P/N: 57958-XXXHXXX-XXX & 57960-XXXHXXX-XXX
  7. SPEC. PLS. REFER TO PS-57957-XXXXX-XXX
  8. PART NUMBER

TYPE	XXX	AWG
0:NONE	001	#20~24
	002	#26~30

MATERIAL 1:PHOSPHOR BRONZE

PLATING L: PURE TIN PLATING  
C: 15u" GOLD PLATING  
D: 30u" GOLD PLATING

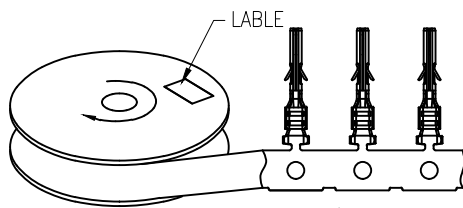

WIND OPERATION AFTER  
PLATING AND BEFORE  
ASSEMBLY

P/N	Dim A	Dim B	Dim C	Dim D	Dim E	Dim F	AWG
57958-TAXX-001	2.29	2.54	0.76	1.91	2.08	0.64	#20~24
57958-TAXX-002	1.91	2.10	0.64	1.47	1.65	0.51	#26~30

一般公差 TOLERANCES X ±0.5 XX ±0.25 X ±0.35 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION ③ MARK IS CRITICAL DIM. ④ MARK IS MAJOR DIM.	品名 (TITLE) 3.0mm WTB CRIMP TERMINAL 圖號 (DWG NO.) 57958-TXXX-XXX	製圖 (DR) '17/06/20 審核 (CHKD) Lu,Jing Quan 核准 (APPD) hsieh,fu yu	張數 (SHEET) 1 OF 1 SIZE A4 REV 0
表面處理 (FINISH)	比例 (SCALE) 5:1	單位 (UNITS) mm	圖例 (SYMBOL)