


- NOTES:
- MATERIAL:
 - HOUSING: Halogen Free PLASTIC, HIGH TEMP UL94V-0;
 - CONTACT: COPPER ALLOY, T=0.12mm
 - FINISH:
 - CONTACT: 50u" MIN. NICKEL OVERALL. 1:Gold Flash(Lead Free)
 - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - SPEC. PLS. REFER TO PS-50213-xxxx
 - PART NUMBER

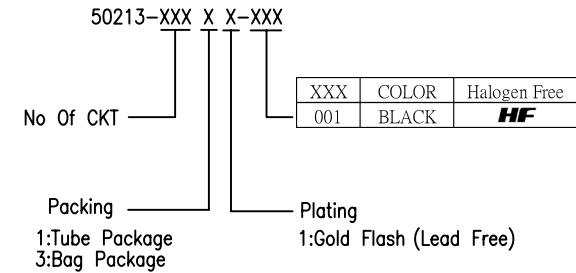

CKT	Dim A	Dim B	Dim C	Dim D	Dim E
2	1.0	2.2	2.8	2.4	4.0
3	2.0	3.2	3.8	3.4	5.0
4	3.0	4.2	4.8	4.4	6.0
5	4.0	5.2	5.8	5.4	7.0
6	5.0	6.2	6.8	6.4	8.0
8	7.0	8.2	8.8	8.4	10.0
10	9.0	10.2	10.8	10.4	12.0

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
檢驗尺寸標示 SYMBOLS Ⓢ Ⓣ INDICATE CLASSIFICATION DIMENSION Ⓢ MARK IS CRITICAL DIM. Ⓣ MARK IS MAJOR DIM.	品名 (TITLE) 1.0mm IDT WTB CONNECTOR	製圖 (DR) *12/02/27 審核 (CHKD) SAM	核准 (APPD) JASON
圖號 (DWG.NO) 50213-XXXXX-XXX	比例 (SCALE) 單位 (UNITS) 1:1 mm	張數 (SHEET) 1 OF 1	尺寸 (SIZE) 版 (REV) A4 A