
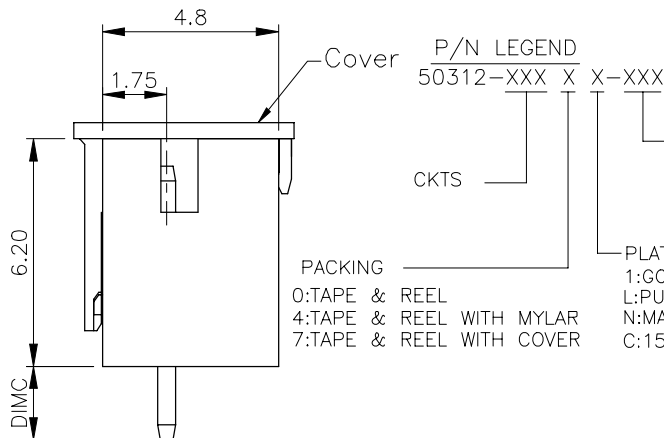


NOTES:

- MATERIAL:
 - HOUSING: HALOGEN FREE PLASTIC, HIGH TEMP., UL94V-0;
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOY
- FINISH:
 - CONTACT:
 - 50~100u" NICKEL UNDERPLATING OVERALL.
 - 1:GOLD FLASH PLATING
 - N: 100~200u" MATT TIN PLATING
 - L: 100~200u" PURE TIN PLATING
 - C:15u" GOLD ON CONTACT FOR LEAD FREE.
 - CONTACT POINT: GOLD15u"MIN
 - SOLDER TAIL: GOLD 1u" MIN
 - FITTING NAIL:
 - 50~100u" NICKEL UNDERPLATING OVERALL.
 - 1:GOLD FLASH PLATING
 - N: 100~200u" MATT TIN PLATING
 - L: 100~200u" PURE TIN PLATING
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50305-XXXX-XXX
- PACKAGE PLS. REFER TO 88323-XXXX-TRP/88323-XXXX3-TRP

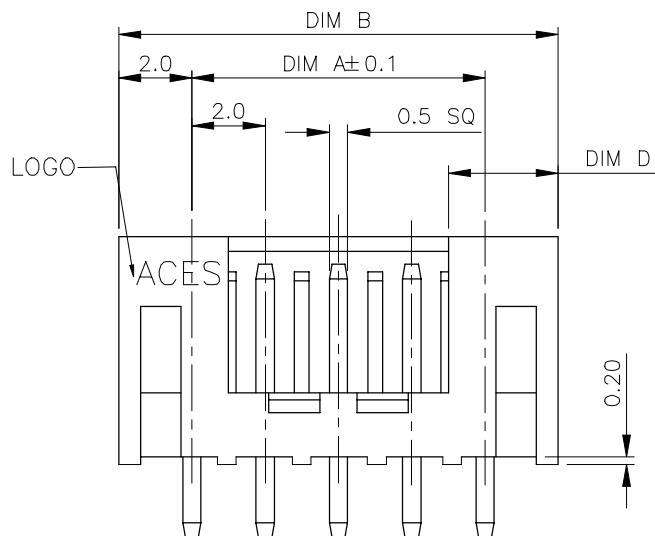



PACKING
 0:TAPE & REEL
 4:TAPE & REEL WITH MYLAR
 7:TAPE & REEL WITH COVER

PLATING
 1:GOLD FLASH
 L:PURE TIN LEAD FREE
 N:MATT TIN LEAD FREE
 C:15u" GOLD ON CONTACT FOR LEAD FREE.

P/N LEGEND
 50312-XXX X X-XXX

Others	Housing color	HALOGEN FREE	DIM C
001	BLACK	HF	2.0
002	BLACK	HF	2.4
003	BLACK	HF	3.0
004	WHITE	HF	3.0

CKT	Dim A	Dim B	DIM D
2	2.0	6.0	2.50
3	4.0	8.0	
4	6.0	10.0	
5	8.0	12.0	
6	10.0	14.0	
7	12.0	16.0	
8	14.0	18.0	
9	16.0	20.0	
10	18.0	22.0	
11	20.0	24.0	
12	22.0	26.0	
13	24.0	28.0	
14	26.0	30.0	
15	28.0	32.0	
16	30.0	34.0	
17	32.0	36.0	
18	34.0	38.0	
19	36.0	40.0	
20	38.0	42.0	

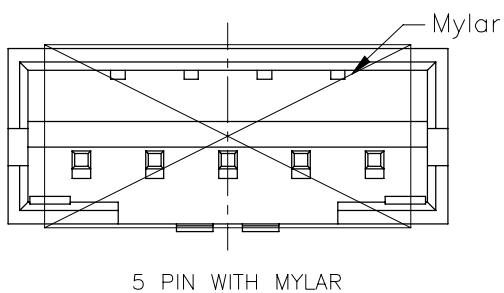

CKT	DIM D
2	2.50
OTHER	3.00

QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ	DRAWN BY Huang,ShunSen	DATE 20/04/22	
	CHECKED BY Lu, Jing Quan	DATE 20/04/22	
GENERAL TOLERANCES (UNLESS SPECIFIED) X ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	APPROVED BY hsieh, fu yu	DATE 20/04/22	RFQ NO. N/A
	UNITS mm	SCALE 5:1	SHEET NO. 1 OF 1
DWG NO. 50312-XXXX-XXX			