
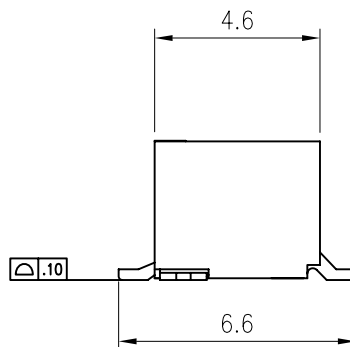


RECOMMENDED PCB LAYOUT

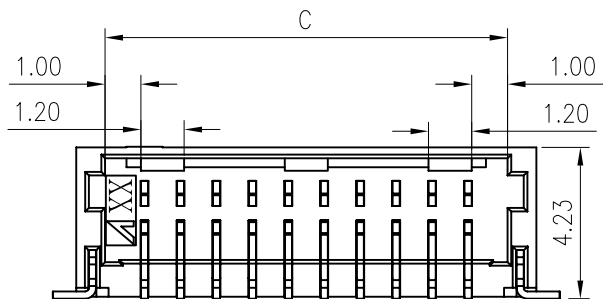

NOTES:

- MATERIAL:
 - HOUSING: HALOGEN FREE PLASTIC, UL94V-0.
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOY
- CONTACT:
 - 50U" NICKEL OVERALL, 120U" MIN. LEAD-FREE (PURE TIN).
 - 1:50U" NICKEL OVERALL, GOLD FLASH OVER ALL (1U" MIN).
 - N:50U" NICKEL OVERALL, 120U" MIN. MATT TIN ALLOVER.
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50251-XXXX-XXX
- PACKAGE PLS. REFER TO 50418-XXXX-TRP
- PART NUMBER

P/N Legend

50418-XXX X X-XXX

Ckts

Packing
0:Tape&Reel
1:Tube

XXX	Material&Color
001	HF Plastic&Black

Plating
L: Lead Free (Pure Tin)
1:G/F over all(lead free)
N:Matt Tin (Lead Free)

CKTS	DIM A	DIM B	DIM C
20	9	13.2	11.2
30	14	18.2	16.2
40	19	23.2	21.2

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
檢驗尺寸標示 SYMBOLS (C) (M) INDICATE CLASSIFICATION DIMENSION (C) MARK IS CRITICAL DIM. (M) MARK IS MAJOR DIM.	品名 (TITLE) 1.0mm WTB Wafer R/A D/R SMT TYPE	製圖 (DR) 09/12/28 Weixing	審核 (CHKD) Sam
	圖號 (DWG.NO) 50418-XXXX-XXX	核准 (APPD) Jason	
表面處理 (FINISH)	比例 (SCALE) 單位 (UNITS) 1:1 mm	張數 (SHEET) OF 1 1	尺寸 (SIZE) REV A4 O