


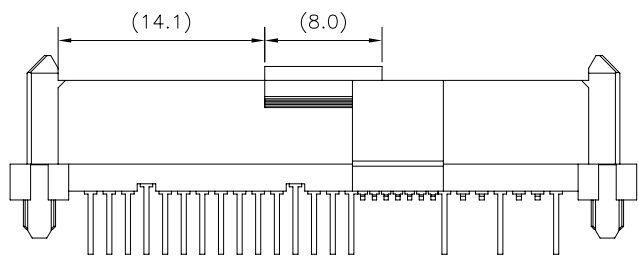


一般公差 TOLERANCES X. ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ϕ ϕ INDICATE CLASSIFICATION DIMENSION		品名 (TITLE) ODD SAS CONN. RECEPTACLE SMT R/A RVS TYPE	
ϕ MARK IS CRITICAL DIM. ϕ MARK IS MAJOR DIM.		製圖 (DR) TANGENHUI 15'/04/15 審核 (CHKD) ANDREW	
表面處理 (FINISH)		圖號 (DWG NO.) 50911-XXXXX-XXX 核准 (APPD) TIM	
比例 (SCALE) 2:1		單位 (UNITS) mm	
張數 (SHEET) 1 OF 2		圖號 (DWG NO.) 50911-XXXXX-XXX	
尺寸 (SIZE) A4		版本 (REV) A	

A | B | C | D | E | F



WITH COVER

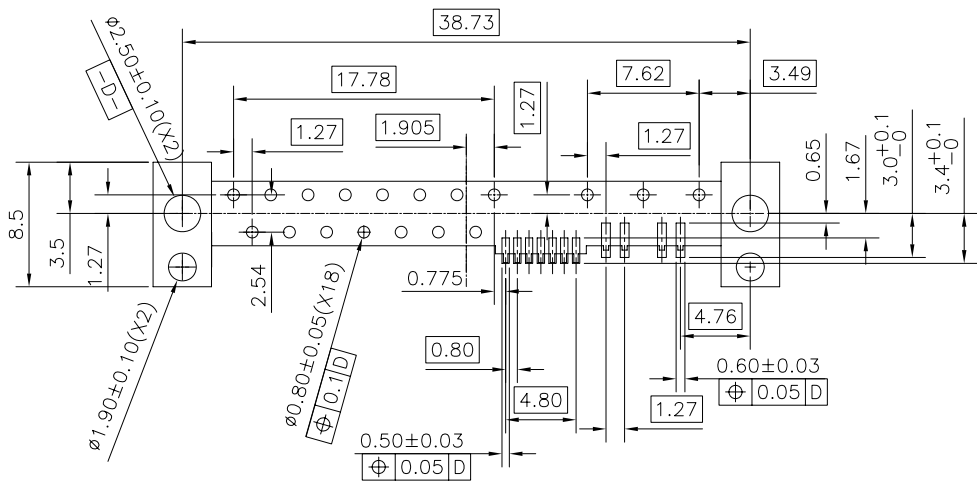

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
COLOR:BLACK.
- 1.2 CONTACT: COPPER ALLOY
- 1.3 FITTING NAIL: COPPER ALLOY

2. FINISH:

- 2.1 CONTACT:50u" MIN. NICKEL PLATING OVERALL,
100u" MIN MATT TIN PLATING ON SOLDER TAIL,
30u"GOLD PLATING ON CONTACT AREA.
- 2.2 FITTING NAIL:50u" MIN. NICKEL UNDERPLATING OVERALL,
100u" MIN. MATT TIN OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.

4. SPEC. PLS. REFER TO PS-50911-XXXX-XXX.

5. PACKAGE PLS. REFER TO 50911-XXXX-XX-TRP.

6. PART NUMBER

50911-XXX X X-XXX

NO OF CKT


029 : 29PIN

PACKING

7:TAPE & REEL WITH COVER

XXX	COLOR	MATERIAL	HF	DIM A	LOGO	PACKING
001	BLACK	HF PLASTIC	Y	3.7	ACES	50911-XXXCR
002	BLACK	HF PLASTIC	Y	3.3	NO ACES	50911-XXXCR-05 (NO ACES LOGO)

PLATING
H: 30u" GOLD ON CONTACT

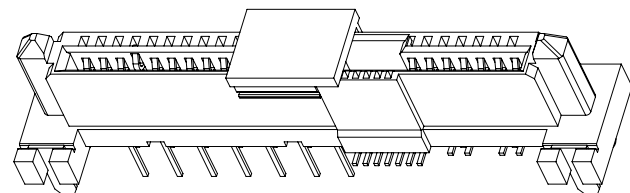

3D示意图

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS Ⓢ Ⓧ INDICATE CLASSIFICATION DIMENSION Ⓢ MARK IS CRITICAL DIM. Ⓧ MARK IS MAJOR DIM.	品名 (TITLE) ODD SAS CONN. RECEPTACLE SMT R/A RVS TYPE	製圖 (DR) TANGENHUI 15'/04/15 審核 (CHKD) ANDREW	核准 (APPD) TIM
圖號 (DWG.NO) 50911-XXXXX-XXX	比例 (SCALE) 2:1	單位 (UNITS) mm	張數 (SHEET) 2 OF 2
表面處理 (FINISH)			SIZE REV A4 A

A | B | C | D | E | F