
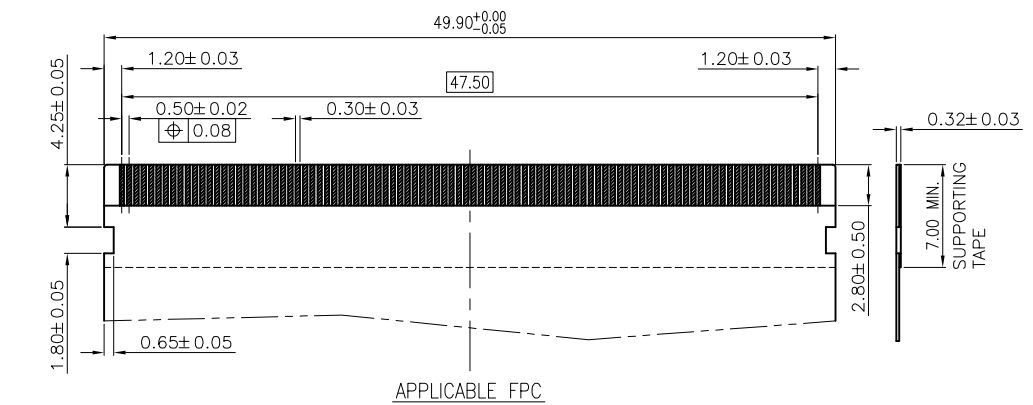


RECOMMENDED PCB PATTERN

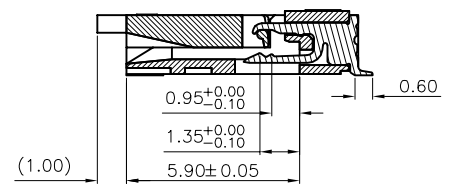

- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASITC HIGH TEMP., UL94 V-0
COLOR: WHITE
 - SLIDER: THERMOPLASITC HIGH TEMP., UL94 V-0
COLOR: BLACK
 - CONTACT: COPPER ALLOY
 - ANCHOR PLATE: BRASS ALLOY
 - PLANTING:
 - CONTACT:
 - 50~100u" NICKEL PLATING OVERALL
 - GOLD FLASH PLATING ON CONTACT AND SOLDER
 - ANCHOR PLATE:
 - 50~100u" NICKEL PLATING OVERALL
 - 100u" MIN. TIN PLATING ON OVERALL
 - REFLOW SOLDER CAPABLE TO 260°C
 - PRODUCT SPEC. REFER TO PS-51636-XXXX-XXX
 - PACKAGE PLS. REFER TO 51636-XXXX-TRP
 - RoHS COMPLIANT PRODUCTS
 - COPLANARITY IS 0.1mm MAX.
 - PART NUMBER
51636-096 X X-XXX
 NO OF CKTS X
 PLATING 001
 PACKING 1: 1u" MIN. GOLD PLATING
 0: TAPE & REEL ON CONTACT AND SOLDER

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS INDICATE CLASSIFICATION DIMENSION MARK IS CRITICAL DIM. MARK IS MAJOR DIM.	品名 (TITLE) 0.5 mm PITCH EASY-ON CONN. SMT R/A B/C TYPE	製圖 (DR) 14'/03/11 審核 (CHKD) SIMON	MARK GRAND
圖號 (DWG NO.) 51636-XXXX-XXX		核准 (APPD) GRAND	張數 (SHEET) 1 OF 1
表面處理 (FINISH)	比例 (SCALE) 2:1	單位 (UNITS) mm	圖號 (DWG NO.)
		尺寸 (SIZE) A4	版本 (REV) 0