


RECOMMENDED P.C.B. LAYOUT  
(GENERAL TOLERANCE: ±0.05mm)

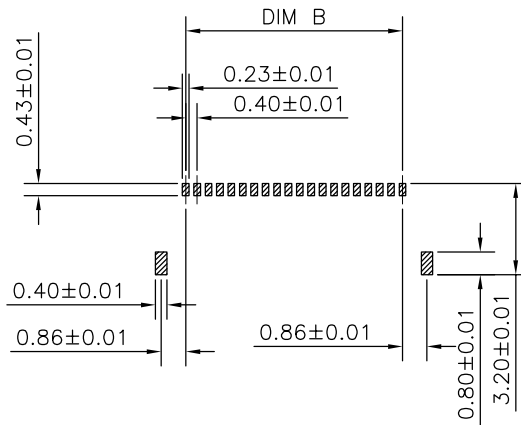

RECOMMENDED METAL MASK PATTERN  
METAL MASK THICKNESS: WHEN 120 μm  
(TERMINAL PORTION OPENING AREA RATIO:86%)

NOTES:

1. MATERIAL:
  - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.UL94V-0; COLOR:BLACK.
  - 1.2 ACTUATOR: THERMOPLASTIC, HIGH TEMP.UL94V-0; COLOR:NATURAL
  - 1.3 CONTACT: COPPER ALLOY
  - 1.4 FITTING NAIL: COPPER ALLOY
2. FINISH:
  - 2.1 CONTACT:
    - 50u" MIN. NICKEL UNDERPLATING OVERALL.
    - M: 3u" GOLD ON CONTACT AND 0.5u"MIN. GOLD ON SOLDER
  - 2.2 FITTING NAIL:
    - 100u" MIN. TIN PLATING ON SOLDER TAILS(LEAD FREE).
    - 50u" MIN. NICKEL UNDERPLATING OVERALL.
3. SPEC. PLS. REFER TO PS-51692-XXXX-XXX
4. PACKAGE PLS. REFER TO 51692-XXXX-XX-TRP
5. PART NUMBER

51692-XXX X X-XXX

NO OF CKT: [ ]  
PACKING: [ ]  
O:TAPE REEL

CODE	LOGO
001	ACES

CONTACT PLATING  
M: 3u" GOLD ON CONTACT AND SOLDER  
FOR SELECTIVENESS PLATING

CKT	DIM A	DIM B	DIM C	DIM D	DIM E
40	18.00	15.60	16.44	17.32	16.40
50	22.00	19.60	20.44	21.32	20.40

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		<b>宏致電子股份有限公司</b> Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ( ) INDICATE CLASSIFICATION DIMENSION ( ) MARK IS CRITICAL DIM. ( ) MARK IS MAJOR DIM.	品名 (TITLE) 0.4 MM PITCH ZIF BACK-FLIP FPC CONN 圖號 (DWG NO.) 51692-XXXXX-XXX	製圖 (DR) '16/10/14 審核 (CHKD) RYAN 核准 (APPD) K.HISATOMI	張數 (SHEET) 1 OF 1 尺寸 (SIZE) A4 版次 (REV) 0
表面處理 (FINISH)	比例 (SCALE) 3:1	單位 (UNITS) mm	