
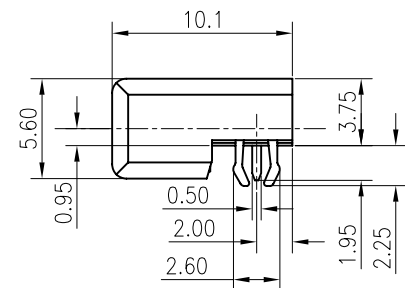


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

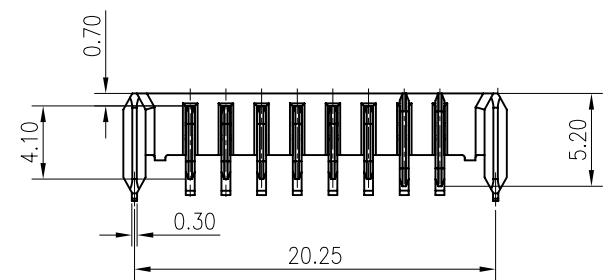

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 FITTING NAIL : COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:
 - 50u" MIN NICKEL UNDERPLATING OVERALL
 - 1:2u" GOLD FLASH
 - 2.2 FITTING NAIL:
 - 50u" MIN NICKEL UNDERPLATING OVERALL
 - 100u"MIN TIN PLATING
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. WAVE SOLDER CAPABLE TO 260°C PER ACES SPEC.
5. SPEC. PLS. REFER TO PS-50975-xxxxx
6. PACKAGE PLS. REFER TO 53018-xxxxx-xx-TRP OR 53018-xxxxx-05-TRP
7. PART NUMBER

P/N LEGEND


53018-008 X X -XXX

NO OF CKT


XXX	Housing Color	DIM A	DIM B	Cover
001	Black	4.80	4.74	With Clip
002	Black	5.80	3.74	Without Clip

PACKING PLATING
1:2u" GOLD FLASH

- 7:TAPE & REEL WITH COVER
- 8:TUBE WITH COVER

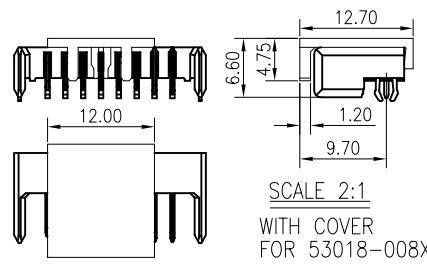

SCALE 2:1
WITH COVER
FOR 53018-008XX-001

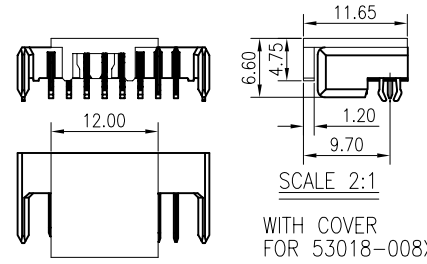

SCALE 2:1
WITH COVER
FOR 53018-008XX-002

一般公差 TOLERANCES X. ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION ③ MARK IS CRITICAL DIM. ④ MARK IS MAJOR DIM.	品名 (TITLE) 2.00mm BATTERY CONN. Male DIP R/A Type H=3.75 圖號 (DWG NO.) 53018-008XX-XXX	製圖 (DR) LLJ 13'/11/16 審核 (CHKD) ANDREW 核准 (APPD) DAVID	張數 (SHEET) 1 OF 1 比例 (SCALE) 2:1 單位 (UNITS) mm
表面處理 (FINISH)	比例 (SCALE) 2:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
			SIZE A4
			REV A