

NOTES:


1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0.
 - 1.2 CONTACT: BRASS.
 - 1.3 NUT: BRASS.
2. FINISH:
 - 2.1 CONTACT:
 - 1:1u"(min) GOLD FLASH PLATING
 - 50u" MIN. NICKEL UNDER PLATING OVERALL
 - 2:1u"(min) GOLD FLASH PLATING ON CONTACT AREA
 - 1u"(min) GOLD FLASH PLATING ON SOLDERTAILS
 - 50u" MIN. NICKEL UNDER PLATING OVERALL
 - 2.2 NUT:
 - 50u" MIN. NICKEL PLATING OVERALL
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. WAVE SOLDER CAPABLE TO 260°C PER ACES SPEC.
5. SPEC.PLS REFER TO PS-50975-XXXX-XXX
6. PACKAGE PLS REFER TO 53032-XXXX-XX-TRP
7. PART NUMBER

53032-007 X X-XXX




NO OF CKT	XXX	Housing Material&Color	Customer
		001 LCP&Black	COMPAL

7:TAPE & REEL WITH COVER PLATING

- 1.1u" (min)GOLD FLASH
- 2.1u"(min) GOLD FLASH PLATING ON CONTACT AREA
- 1u"(min) GOLD FLASH PLATING ON SOLDERTAILS

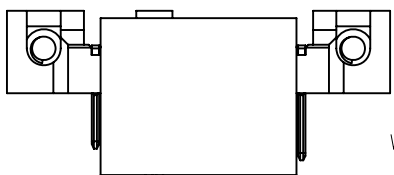

WITH CAP DRAWING SCALE:1:1

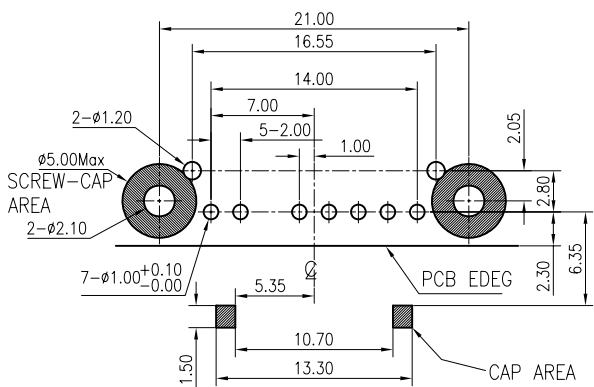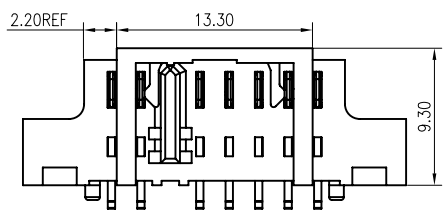

RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE±0.05mm,THICKNESS:1.20±0.05mm

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°	宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS Ⓢ INDICATE CLASSIFICATION DIMENSION Ⓢ MARK IS CRITICAL DIM. Ⓢ MARK IS MAJOR DIM.	品名 (TITLE) BATTERY CONN MALE 7PIN 2.0PITCH (H=8.50mm) 圖號 (DWG NO.) 53032-XXXXX-XXX(COMPAL)	製圖 (DR) TANGENHUI 12/12/11 審核 (CHKD) CARL 核准 (APPD) JASON
表面處理 (FINISH)	比例 (SCALE) 4:1	單位 (UNITS) mm
	張數 (SHEET) 1 OF 1	圖號 (DWG NO.) 1 OF 1